

# HARSTRA

## WASH 36

PROFESSIONAL WASHING MACHINE



Giek 11  
3891 KA Zeewolde  
The Netherlands  
T +31 (0) 36 522 2142

## Function

The washing machine Wash36 is specially developed for professional cleaning breathing air masks in large quantities. The Wash36 has capacity to clean 36 masks per cycle. For this purpose, a pin frame is mounted on 2 levels, each frame has space for 18 masks.

## Description

In the **wash section** the products are sprayed on all sides with a large quantity of water from a moving wash frame. A detergent may be dissolved in this water. The washing water returns to the wash tank by a removable filter. An overflow and supply of clean tap water keep the level in the wash tank constant. The water level in the wash tank is also protected by a low level-cut-out. The water in the wash tank is heated. A digital temperature controller controls the heating system.

The wash section components are:

- a centrifugal pump for the main wash
- a level sensor, as low level-cut-out and high and low water control system
- an overflow in the wash tank
- a wash tank, capacity approximately 90 and a rinsing tank approx. 20 litres
- a water discharge pump to drain the wash tank
- a removable filter
- moving wash frame with wash nozzles for the main wash and a second system with stainless steel nozzles for the rinse cycles.


The **rinse section** uses clean tap water. There is a magnetic valve on the rinsing water (tap water) supply pipe to the rinse tank. This will retain the tank level automatically by level switches. The water consumption is approx. 20 litre per wash cycle. The centrifugal rinse pump will pump the water to the stainless steel nozzles inside the moving washing frame. After rinsing the water returns to the water tank via the filter basket in the wash section.

You will find the **motor compartment** on the backside of the machine. The control panel is on the front side of the machine. A water filter is in the water pipe, just in front of the magnetic valves.

This machine has a main circuit breaker, with which you can stop the machine immediately in the event of an emergency or a fault. It is a red/yellow switch. You will find it at the control panel of the machine.

# HARSTRA

## Diagrammatic view of the Wash36:

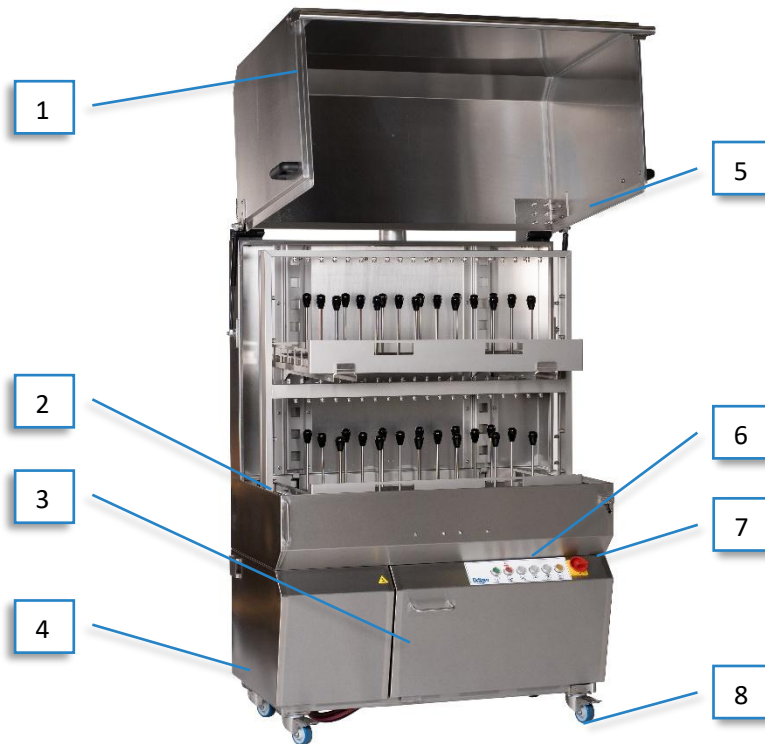

Item	Description
------	-------------

- |   |                                     |
|---|-------------------------------------|
| 1 | Cabinet door                        |
| 2 | Filter (inside washing area)        |
| 3 | Electrical cabinet/door             |
| 4 | Motor + wash tank compartment       |
| 5 | Cabinet door hinges and gas springs |
| 6 | Control panel                       |
| 7 | Main Switch                         |
| 8 | Castors                             |

### Specifications

Dimensions	height x width x depth in mm
External	1800(2410*) x 1335x 850(1445*)
*with open hood and extended drawer Wash place	685 x 1030 x 610
Weight	400 kg
External	grinded stainless steel type 304
Internal	stainless steel type 304
Doors	1 piece, vertical closing (front loader), with 2 handles and door Security/Emergency stop
Wheels	4 castors (inhibited)
Control	Siemens PLC
Wash pump power	3,0 kW
Wash pump capacity	1100 liter/ per min. at 1,5 bar
Wash tank capacity	90 liter
Heating	9 kW
Three wash cycle times	5, 10 and 22 minutes
Wash temperature	adjustable to 55°C.
Wash system	moving wash frame with stainless steel nozzles on 4 sides
Cleansing dosage	automatic, adjustable
Power rinse pump	370 Watt
Water rinse tank capacity	20 liter
Heating	9 kW
Rinse time	adjustable (by factory)
Rinse water temperature	max. 55°C.
Rinse system	moving rinse frame with stainless steel nozzles on 4 sides
Neutralization dose	automatic, adjustable
Drain pump	80 Watt

### Connections

Voltage	5-pole CEE-plug, 400 Volt AC, 3 phases, N + PE, 50-60 Hz.
Power	20,6 kW, fused at 3 x 32 Ampère
Cable connection	5 x 6 mm <sup>2</sup>
Water supply connection	G ¾" max. 50°C.
Water hardness	2 till 4° dH
Required water pressure	2 – 3 Bar
Water consumption by rinse	6,6 liter per 15 seconds rinse*
Water drain	Ø 50 mm
Maximum height drain hose	200 mm without syphon
Noise volume	70 dB(A)
High pressure system:	60 Bar

### Delivery terms

Time of delivery	on stock
Terms of delivery	ex-factory Zeewolde, The Netherlands
Guarantee	12 months, wear and tear parts are excluded from guarantee